

GENERAL[®]
PACKING



EUROSEAL[®] 2303C

High Performance and Long Service Life



PERFORMANCE SUPERIORI

La baderna EUROSEAL® 2303C è costituita da grafite e fibre di carbonio ed è adatta per pompe e valvole. Presenta un'eccellente potere di tenuta ed un'elevata adattabilità.

EUROSEAL® 2303C, essendo priva di collanti additivi, ha una ridotta perdita di peso ad alte temperature; si evita così la necessità di riserraggio del premistoppa. Inoltre, può funzionare per lunghi periodi di tempo senza subire fenomeni di irrigidimento e/o invecchiamento.

EUROSEAL® 2303C è una baderna altamente versatile e creata per soddisfare le esigenze di diversi impianti, specialmente nei settori petrolchimico, degli idrocarburi e termoelettrico.

SUPERIOR PERFORMANCE

EUROSEAL® 2303C packing is made of yarns containing graphite and carbon fibers and is suitable for pumps and valves. It has an excellent sealability and is highly adaptable.

EUROSEAL® 2303C is glue-free; therefore the weight loss is very low even at high temperature and the packing does not need any re-torquing of the stuffing box. Moreover, it can be in service for a long period of time without hardening or ageing.

EUROSEAL® 2303C is an extremely versatile packing, designed to meet the needs of many plants, especially those in the petrochemical, hydrocarbons, and power generation sectors.

CONFEZIONI STANDARD STANDARD PACKAGING




1/8" - 9/16" (3 mm - 14 mm)	2 – 2,2 Kg
5/8" - 1" (16 mm - 25 mm)	4 – 4,4 Kg

Sezioni superiori a 25 mm disponibili su richiesta
Sections over 25 mm available on request

PROPRIETA' TECNICHE TECHNICAL PROPERTIES



T _{Min}	-200° C
T _{max}	650° C
P _{max} (valve)	280 bar
P _{max} (pumps)	25 bar
pH	0 - 14
Speed	22 m/s

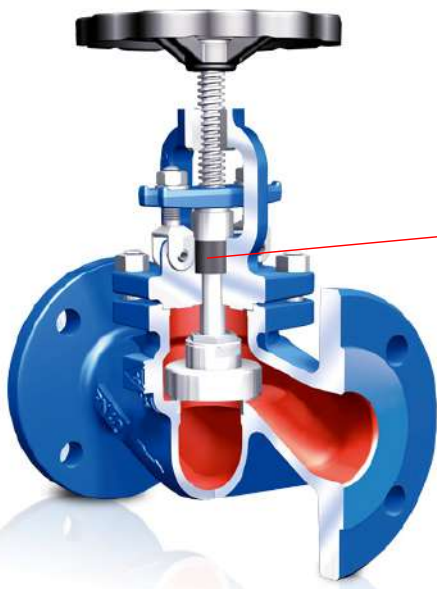

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.