

**GENERAL[®]
PACKING**



EUROSEAL[®] 2303H

High Performance and Long Service Life




PERFORMANCE SUPERIORI

EUROSEAL® 2303H è una baderna costituita da filamenti intrecciati di purissima grafite minerale espansa contenuti in una sottile calzamaglia di Inconel. Questo processo di costruzione è terminato dall'aggiunta di agenti anticorrosione. Un eccellente potere di tenuta, un bassissimo coefficiente di attrito ed un'elevata adattabilità a qualsiasi premistoppa sono le caratteristiche di EUROSEAL® 2303H. La baderna EUROSEAL® 2303H non perde peso né volume durante cicli di temperatura o di pressione, pertanto non necessita aggiustamenti. EUROSEAL® 2303H non richiede l'impiego di molle a tazza né di anelli anti-estrusione. Grazie a queste peculiarità, EUROSEAL® 2303H è largamente impiegata su valvole regolatrici e ovunque sia necessaria una certificazione «Fugitive Emissions» e/o «Fire Safe».

SUPERIOR PERFORMANCE

EUROSEAL® 2303H is a braided packing made with filaments of pure mineral expanded graphite covered by an Inconel net. This construction process ends with the addition of corrosion inhibitors.

Excellent sealing power, low coefficient of friction and high adaptability to any stuffing box are EUROSEAL® 2303H features. EUROSEAL® 2303H packing does not lose weight and volume during thermal or pressure cycling; thus it does not need further tightening. EUROSEAL® 2303H does not require live loading systems and top-bottom antiextrusion rings. With these peculiarities, EUROSEAL® 2303H packing is widely used on control valves and wherever you need a certification «Fugitive Emissions» and/or «Fire Safe».

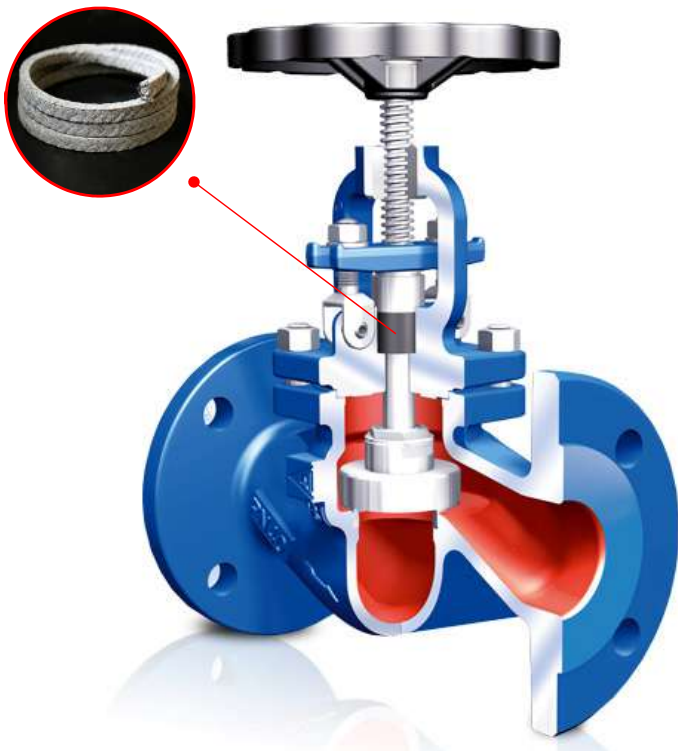

CERTIFICATI CERTIFICATES



ISO 10497, API 6FA & 607	ISO 15848 & VDI 2440
Fire Test	Fugitive emission

PROPRIETA' TECNICHE TECHNICAL PROPERTIES



T _{Min}	-200° C
T _{max} (steam)	650° C
P _{max}	310 bar
pH	0 - 14

CONFEZIONI STANDARD STANDARD PACKAGING



1/8" - 9/16" (3 mm - 14 mm)	2 – 2,2 Kg
5/8" - 1" (16 mm - 25 mm)	4 – 4,4 Kg

Sezioni superiori a 25 mm disponibili su richiesta
Sections over 25 mm available on request

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences GENERAL PACKING ITALY® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. GENERAL PACKING ITALY® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.